
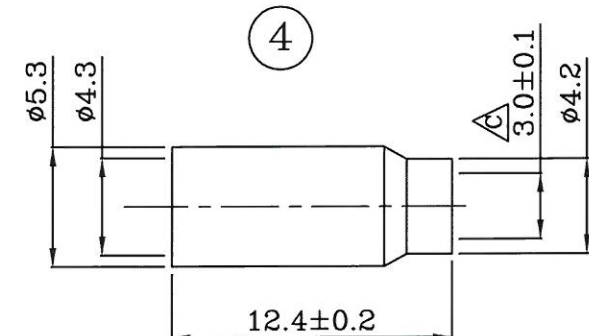
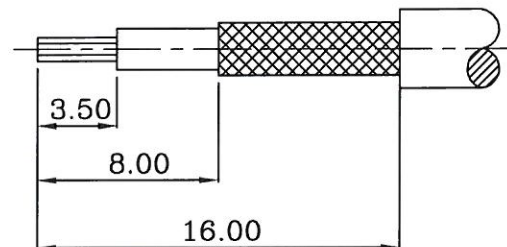
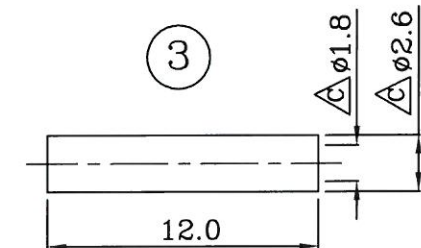
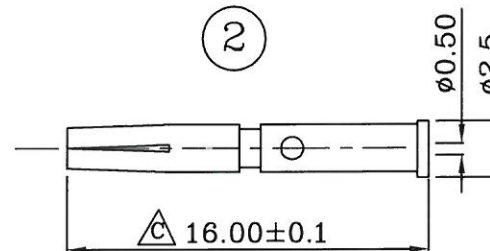


REV.	DESCRIPTION	DRAWN	ECN	DATE
A	NEW RELEASE(3106-0079)	Sammi	05-098	03-28'2005
B	11.4=>12.0,11.2=>12.4	TINA	09-235	08-31'2009
C	SEE ECN(3007-11666)	TINA	11-506	10-24'2011

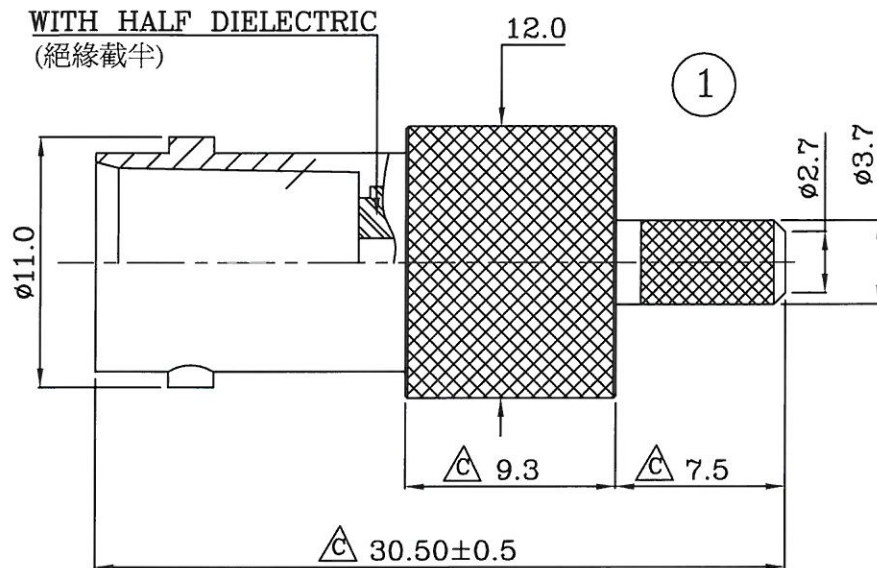

ELECTRICAL PERFORMANCE:
 1.NOMINAL IMPEDANCE 75 OHMS.
 2.FREQUENCY RANGE: 0~2 GHz.
 3.WORKING VOLTAGE: 250V.
 4.DIELECTRIC SITHSTANDING VOLTAGE: 750 VOLTS RMS.

Recommended Cable Stripping Dim's.

4	FERRULE	BRASS	NICKEL
3	INSULATOR	PE	NONE
2	CONTACT	P.BRONZE	GOLD
1	LOCK WASHER	IRON	TIN
	INSULATOR	TEFLON	NONE
	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE:			
DIMENSION	ANGLE		
INTEGRAL DIMENSIONS ±1.0	ANGULAR DIMENSIONS ±5.0		
1 PLACE DECIMAL ±0.5	HOLES UNDER Ø0.5 ±0.1		
2 PLACE DECIMALS ±0.25	ROUGHNESS		
FINISH: SEE TABLE	MATERIAL: SEE TABLE		

nicon Precise Corp.

DRAWN BY:	Sammi	DATE:	03-28'2005
ENGR BY:		DATE:	
APVD BY:	Tina	DATE:	10/26/2011

TITLE: BNC ST. JACK CRIMP TYPE FOR RG179/U CABLE			
Model NO: 15801			
Drawing NO: 12-15801			
UNIT: MM	SIZE: A4	REV: C	CAD FILE :
SCALE: 3:1	SHEET 1	OF 1	Z:\NEW Dwg\15XXX\158XX