


3		4		
REV.	DESCRIPTION	DRAWN	ECN	DATE
1	PROPOSAL(3007-9147)	TINA		03-30/2009
A	NEW RELEASE(3006-9005)	TINA	09-100	04-09/2009

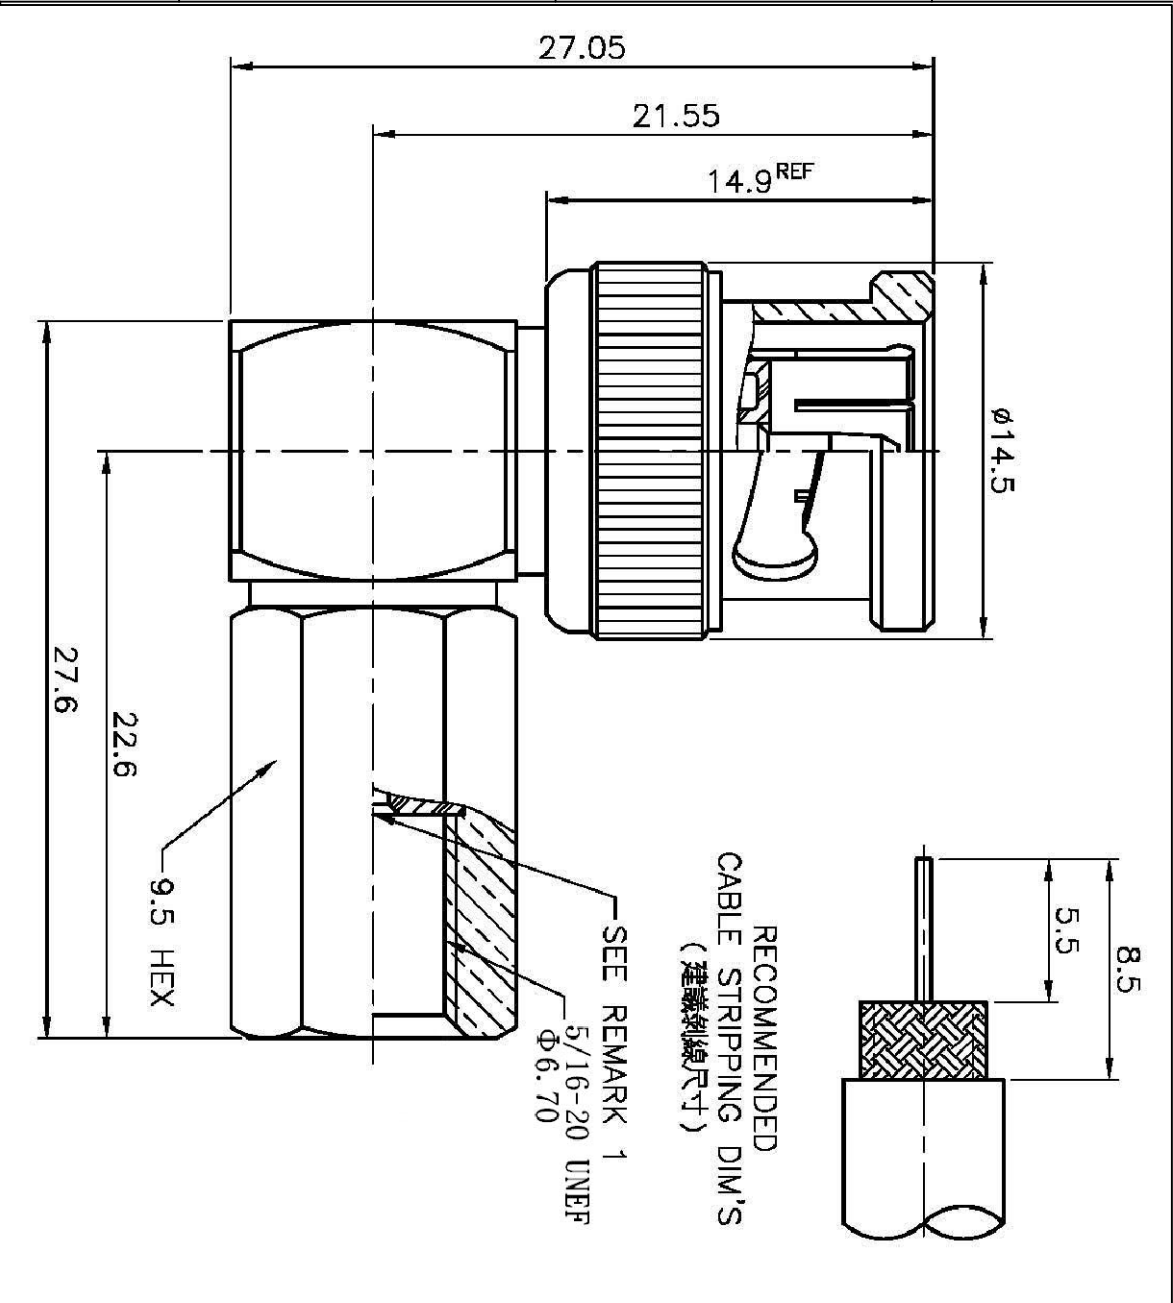

REMARK: 1. ACCEPT $\phi 0.54 \sim \phi 1.06$ Solid PIN
(接受 $\phi 0.54 \sim \phi 1.06$ 單蕊的線芯)

BRAID HOLDER	BRASS	NICKEL
INSULATOR	PPS+40%GF	BEIGE
SHELL	BRASS	NICKEL
GASKET	SILICONE	RED
C RING	SS41	NICKEL
SPRING	SK5	NICKEL
WASHER	SS41	NICKEL
INSULATOR	DELFIN	WHITE
BODY	BRASS	NICKEL
CONTACT	Be COPPER	GOLD
CONTACT	BRASS	GOLD
CUBE BODY	BRASS	NICKEL
DESCRIPTION	MATERIALS	FINISHED

RoHS

COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE:

DIMENSION	DIMENSIONS	ANGLE
INTEGRAL	± 1.0	ANGULAR DIMENSIONS $\pm 5.0^\circ$
1 PLACE	± 0.5	HOLES UNDER $\phi 0.5$ ± 0.1
2 PLACE	± 0.25	ROUGHNESS



FINISH: SEE TABLE
MATERIAL: SEE TABLE

nicon Precise Corp.

DRAWN BY:	TINA	DATE:	03-30/2009
ENGR BY:	TINA	DATE:	03-30/2009
APVD BY:		DATE:	

TITLE: 75 Ohm BNC R/A PLUG
TWISTON FOR RG59/U

Model NO: 15804

Drawing NO:		15804		CAD FILE :	
UNIT:	MM	SIZE:	A4	REV.	A
SCALE:	4:1	SHEET	1	OF	1
		Z:\NEW		Dwg\158xx	