


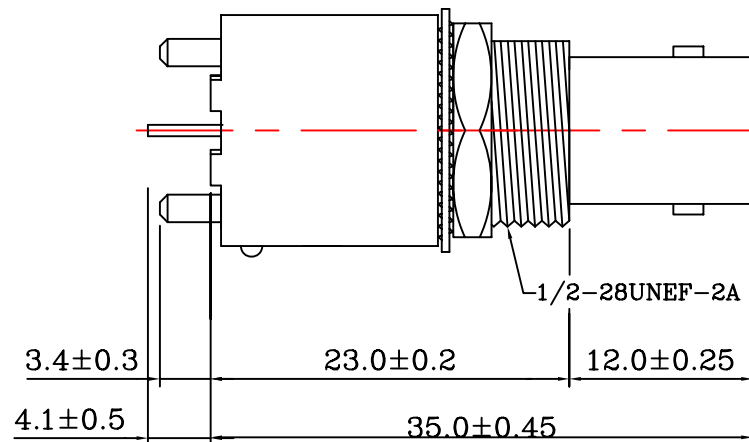


| REV. | DESCRIPTION            | DRAWN | ECN    | DATE       |
|------|------------------------|-------|--------|------------|
| A    | NEW RELEASE(3007-7285) | TINA  | 07-315 | 12-18'2007 |

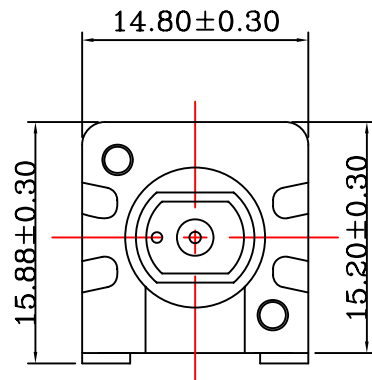

Recommended  
Panel Hole

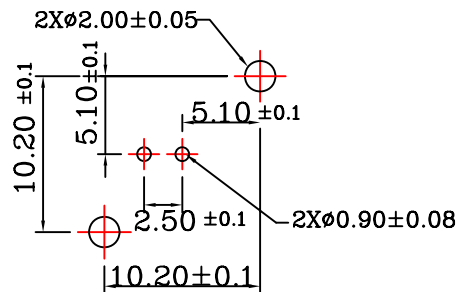

Recommended  
PCBI Hole

#### ELECTRICAL PERFORMANCE:


- 1.Nominal Impedance : 50 ohms.
- 2.Frequency Range : 0 ~ 4 GHz.
- 3.Working Voltage : 500 V.
- 4.Insulator Resistance : 5000 Megohms minimum.
- 5.Dielectric Withstanding Voltage : 1500 Volts Rms.

|             |                  |          |             |      |
|-------------|------------------|----------|-------------|------|
| WASHER      | SK-5             | NICKEL   | 083000-509  | 1    |
| NUT         | BRASS            | NICKEL   | 073000-109  | 1    |
| CONTACT     | P.BRONZE         | GOLD+TIN | 3108-***A1  | 1    |
| GND         | Cu COVERED STEEL | TIN      |             | 1    |
| INSULATOR   | P.P UL 94HB      | NONE     |             | 1    |
| BODY        | ZINC ALLOY       | NICKEL   |             | 1    |
| HOUSING     | P.B.T.+30%GF     | NONE     |             | 1    |
| POST        | BRASS            | TIN      |             | 2    |
| DESCRIPTION | MATERIALS        | FINISHED | PART NUMBER | Q'TY |

**RoHS**  
COMPLIANT  
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE:

|                          |                          |
|--------------------------|--------------------------|
| DIMENSION                | ANGLE                    |
| INTEGRAL DIMENSIONS ±1.0 | ANGULAR DIMENSIONS ±5.0° |
| 1 PLACE DECIMAL ±0.5     | HOLES UNDER Ø0.5 ±0.1    |
| 2 PLACE DECIMALS ±0.25   | ROUGHNESS                |



FINISH: SEE TABLE MATERIAL: SEE TABLE

**nicon** Precise Corp.

TITLE: BNC STRAIGHT JACK PCB RECEPTACLE

Model NO: 14003

Drawing NO: 12-14003

DRAWN BY: TINA DATE: 12-18'2007

ENGR BY: TINA DATE: 12-18'2007

APVD BY: DATE:

UNIT: MM SIZE: A4 REV: A CAD FILE :

SCALE: 2:1 SHEET 1 OF 1 Z:\NEW Dwg\14XXX