


REV.	DESCRIPTION	DRAWN	ECN	DATE
A	NEW RELEASE (3007-8365)	TINA	08-262	10-08'2008

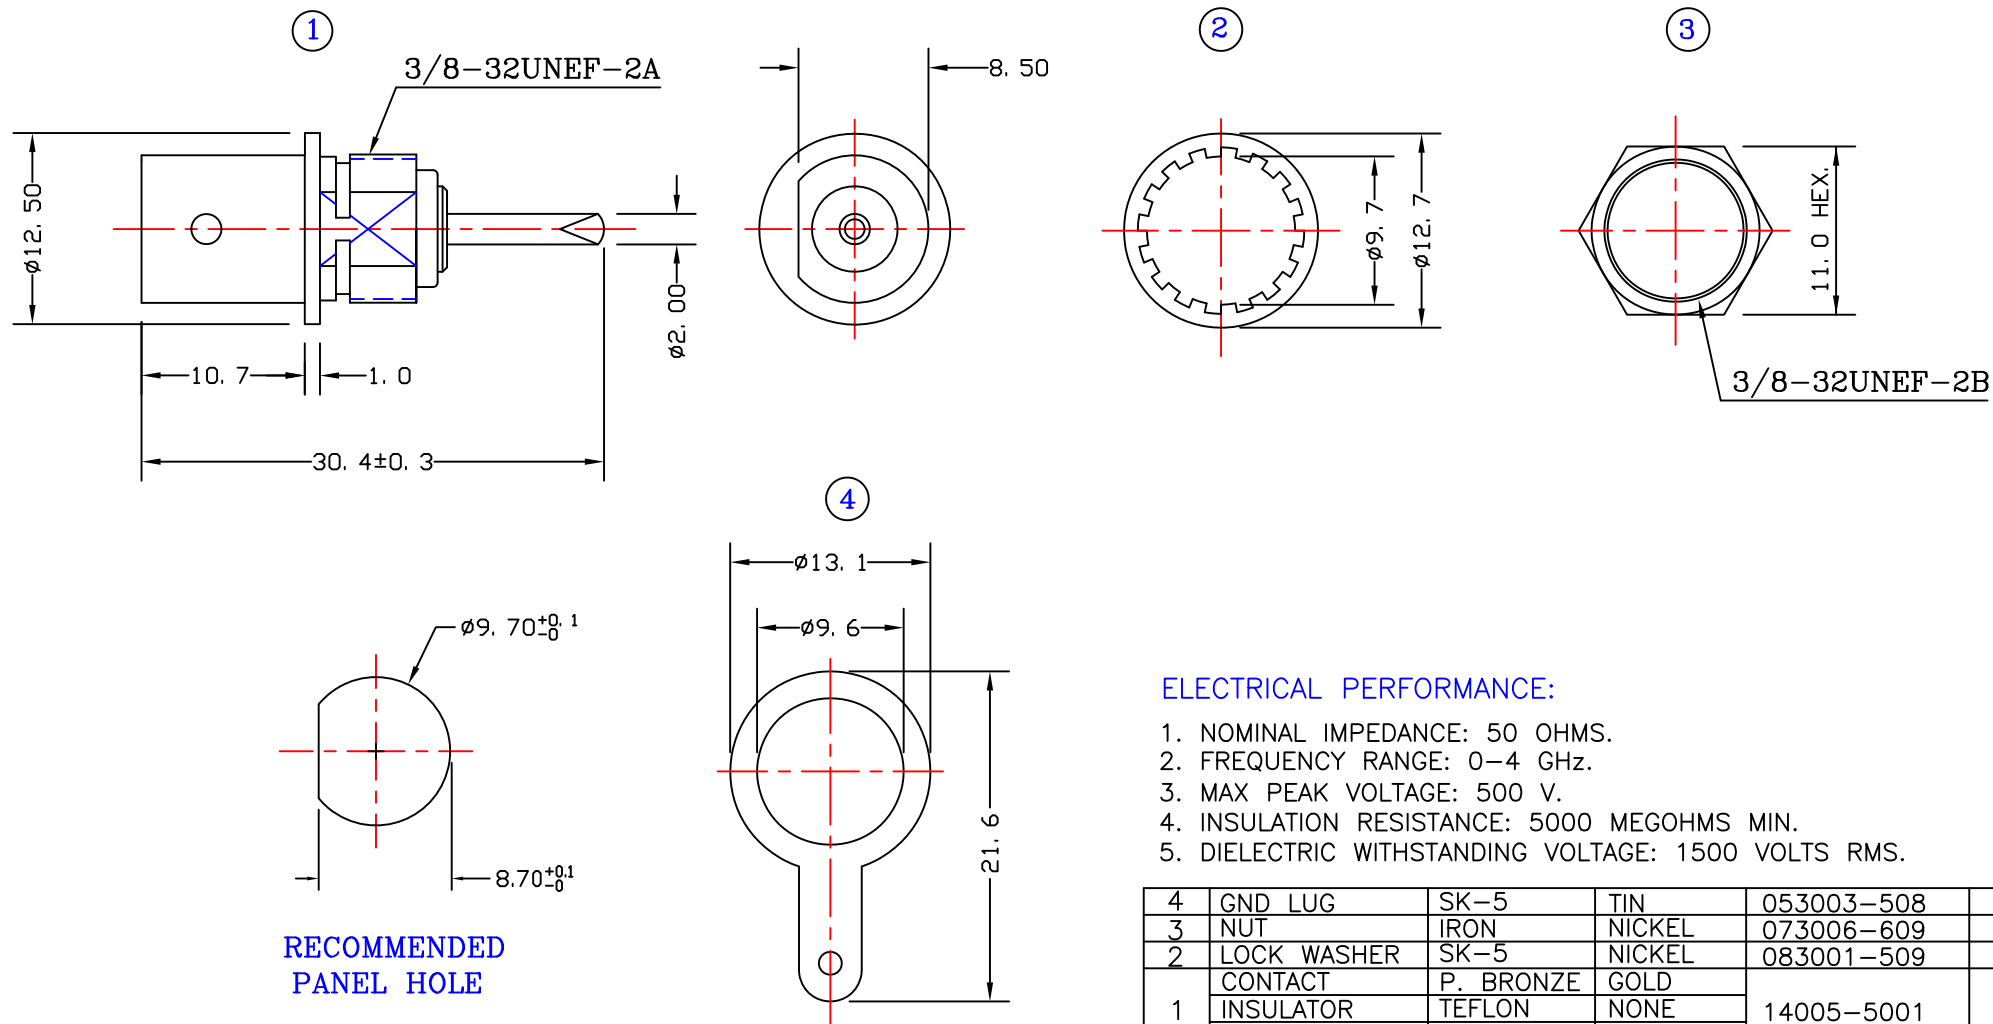

ELECTRICAL PERFORMANCE:


1. NOMINAL IMPEDANCE: 50 OHMS.
2. FREQUENCY RANGE: 0-4 GHz.
3. MAX PEAK VOLTAGE: 500 V.
4. INSULATION RESISTANCE: 5000 MEGOHMS MIN.
5. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VOLTS RMS.

4	GND LUG	SK-5	TIN	053003-508	1
3	NUT	IRON	NICKEL	073006-609	1
2	LOCK WASHER	SK-5	NICKEL	083001-509	1
1	CONTACT	P. BRONZE	GOLD	14005-5001	1
	INSULATOR	TEFLON	NONE		
	BODY	BRASS	NICKEL		
ITEM	DESCRIPTION	MATERIAL	FINISHED	PART NUMBER	Q'TY

RoHS
COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE:

DIMENSION	ANGLE
INTEGRAL DIMENSIONS ±1.0	ANGULAR DIMENSIONS ±5.0°
1 PLACE DECIMAL ±0.5	HOLES UNDER Ø0.5 ±0.1
2 PLACE DECIMALS ±0.25	ROUGHNESS



FINISH: SEE TABLE MATERIAL: SEE TABLE



Precise Corp.

DRAWN BY:	TINA	DATE:	10-08'2008
ENGR BY:	TINA	DATE:	10-08'2008
APVD BY:		DATE:	

TITLE:					
BNC ST. JACK BULKHEAD RECEPTACLE					
Model NO:		14005			
Drawing NO.:		12-14005			
UNIT:	MM	SIZE: A4	REV. A	CAD FILE :	
SCALE:	2:1	SHEET	1	OF 1	Z:\NEW Dwg\14XXX\14005