




REV.	DESCRIPTION	DRAWN	ECN	DATE
F	SEE ECN	TINA	00-207	07-07'2000
G	SEE ECN	TINA	06-353	12-21'2006

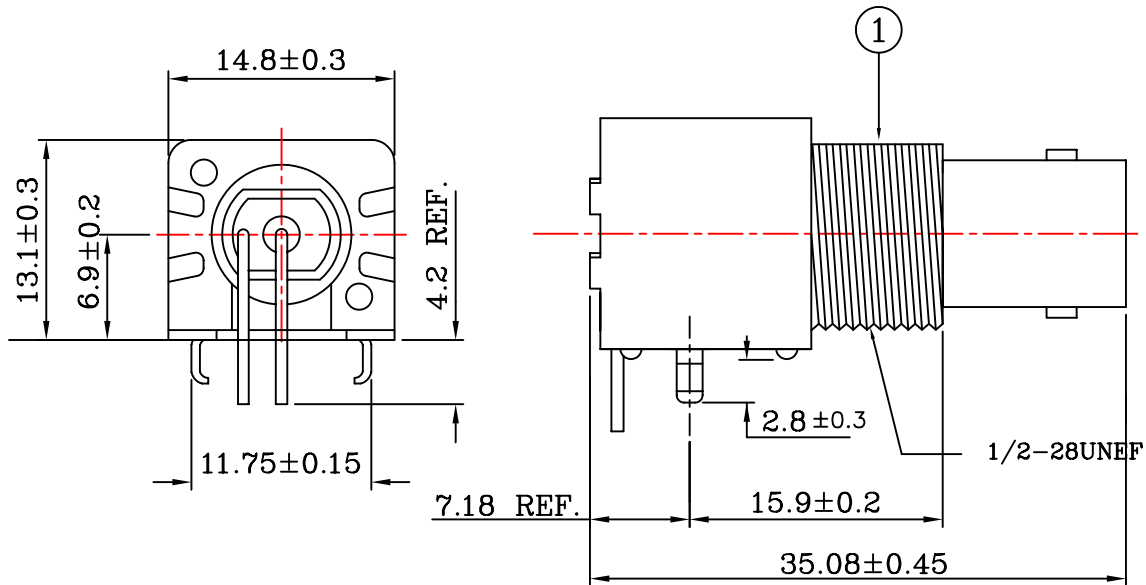

RECOMMEND
PANEL HOLE


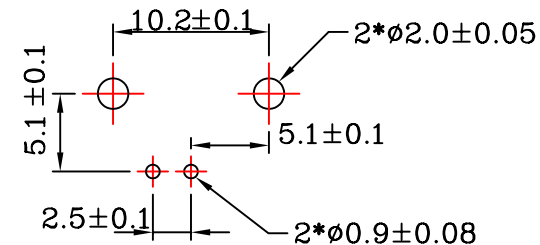


RECOMMENDED PCB HOLE

NOTES:

- 1.NOMINAL IMPEDANCE 75 OHMS.
- 2.FREQUENCY RANGE: 0-1 GHz.
- 3.MAX PEAK VOLTAGE: 500V.
- 4.INSULATION RESISTANCE: 5000 MEGOHMS MIN.
- 5.DIELECTRIC WITHSTANDING VOLTAGE:1500 VOLTS RMS.

ORDER NO.	BRAND/COLOR
3101-010B	NONE/WHITE
3101-110B	IO /WHITE
3101-020B	NONE/BLACK
3101-120B	IO /BLACK

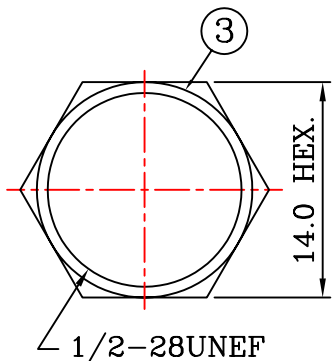


3	NUT	BRASS	NICKEL	073000-109	1
2	LOCK WASHER	SK-5	NICKEL	083000-509	1
1	CONTACT	P.BRONZE	GOLD+TIN	3101-***B1	1
	GROUNDING	Cu COVERED STEEL	TIN		
	INSULATOR	P.P	NONE		
	BODY	ZINC ALLOY	NICKEL		
	HOUSING	PBT+30%G.F.	NONE		
	POST	SK-5	TIN		
ITEM	DESCRIPTION	MATERIAL	FINISHED	PART NUMBER	Q'TY

RoHS
COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE:

DIMENSION	ANGLE
INTEGRAL DIMENSIONS ±1.0	ANGULAR DIMENSIONS ±5.0°
1 PLACE DECIMAL ±0.3	HOLES UNDER Ø0.5 ±0.1
2 PLACE DECIMALS ±0.15	ROUGHNESS



FINISH: SEE TABLE MATERIAL: SEE TABLE

nicon Precise Corp.

TITLE: BNC R/A JACK PCB RECEPTACLE

Model NO: 3101-***B

Drawing NO: 3101-***B

DRAWN BY: 林藝芳 DATE: 11-07'96

ENGR BY: DATE:

APVD BY: DATE:

UNIT: MM SIZE: A4 REV. G CAD FILE :

SCALE: 2:1 SHEET 1 OF 1 Z:\Sales\BNC\75