

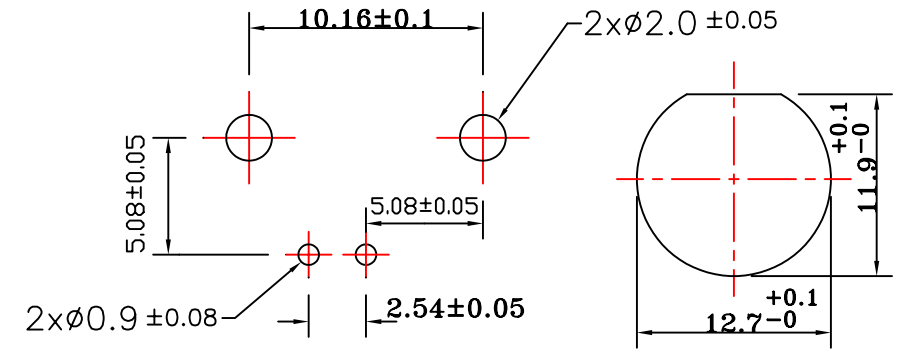


REV.	DESCRIPTION	DRAWN	ECN	DATE
D	SEE ECN	TINA	02-095	04-15'2002
E	SEE ECN	TINA	06-353	12-21'2006

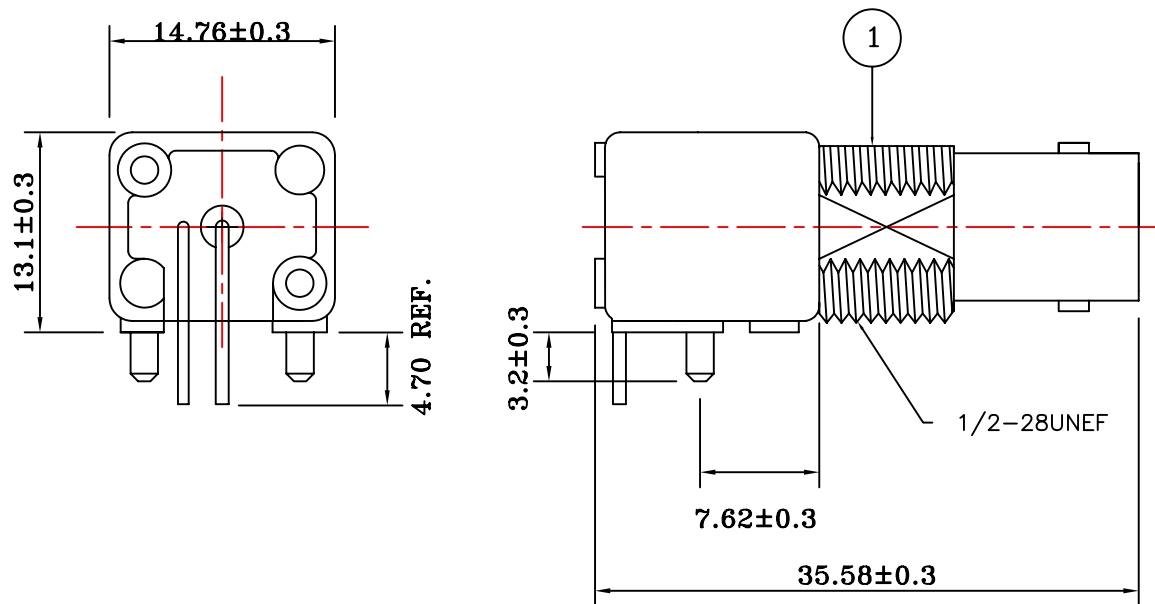

PCB HOLE CONFIGURATION PANEL CUTOUT

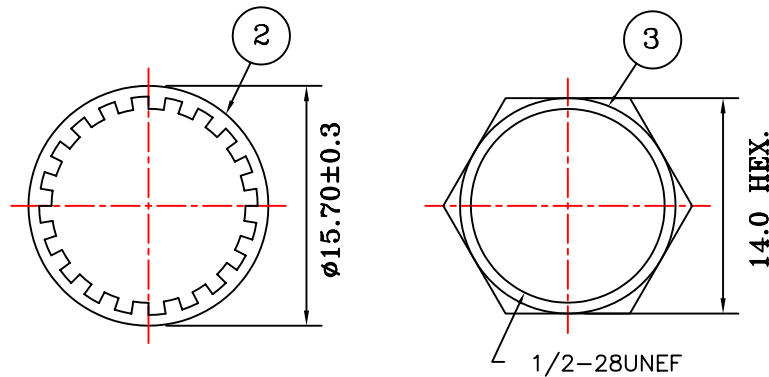

NOTES:

1. NOMINAL IMPEDANCE: 75 OHMS.
2. FREQUENCY RANGE: 0-1 GHz.
3. MAX PEAK VOLTAGE: 500V.
4. INSULATION RESISTANCE: 5000 MEGOHMS MIN.
5. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VOLTS RMS.


ORDER NO.	BRAND
3106-000B	NONE
3106-100B	IO

3	NUT	BRASS	NICKEL	073000-109	1
2	LOCK WASHER	SK-5	NICKEL	083000-509	1
1	GROUNDING	Cu COVERED STEEL	TIN	3106-***B1	1
	POST	BRASS	TIN		
	CONTACT	P.BRONZE	GOLD & TIN		
	INSULATOR	P.P	NONE		
	BODY	ZINC ALLOY	NICKEL		
ITEM	DESCRIPTION	MATERIAL	FINISHED	PART NUMBER	Q'TY

RoHS
COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE:

DIMENSION	ANGLE
INTEGRAL DIMENSIONS ± 1.0	ANGULAR DIMENSIONS $\pm 5.0^\circ$
1 PLACE DECIMAL ± 0.3	HOLES UNDER $\phi 0.5 \pm 0.1$
2 PLACE DECIMALS ± 0.15	ROUGHNESS



FINISH: SEE TABLE MATERIAL: SEE TABLE

nicon Precise Corp.

TITLE: BNC R/A JACK PCB RECEPTACLE(75 Ohms)

Model NO: 3106-***B

Drawing NO: 3106-***B

DRAWN BY:	DATE: 08-29'95	UNIT: MM	SIZE: A4	REV. E	CAD FILE :
ENGR BY:	DATE:	SCALE: 2:1	SHEET 1 OF 1	Z:\Sales\BNC\	
APVD BY:	DATE:				