





3		4		
REV.	DESCRIPTION	DRAWN	ECN	DATE
H	SEE ECN	TINA	99-432	01-26'2000
I	轉換新圖框(3007-13061)	TINA	13-090	03-15'2013

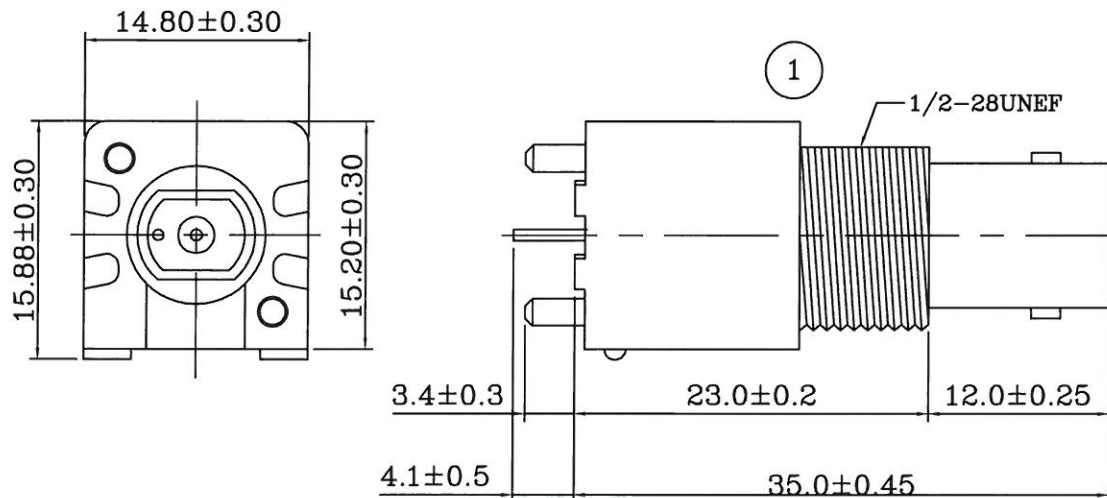

Recommended
Panel Hole

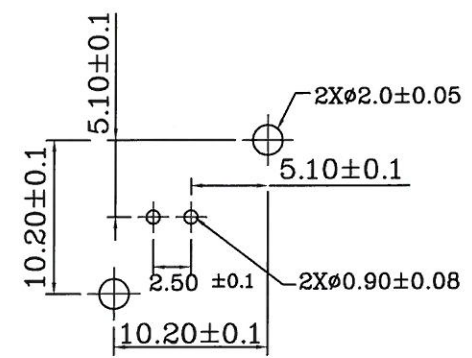

Recommended
PCB Hole

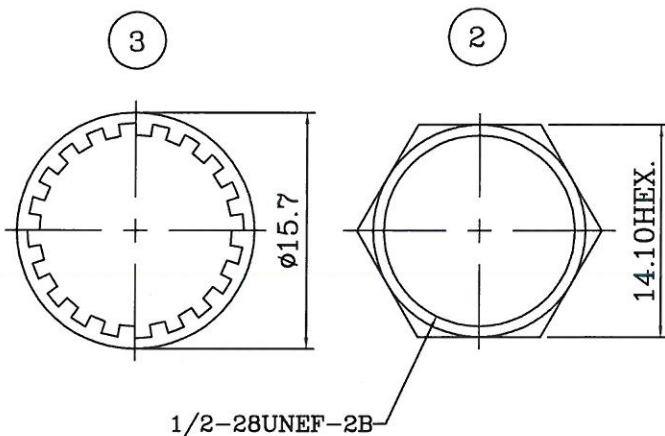

ELECTRICAL PERFORMANCE:
 1.Nominal Impedance : 50 ohms.
 2.Frequency Range : 0 ~ 4 GHz.
 3.Working Voltage : 500 V.
 4.Insulator Resistance : 5000 Megohms minimum.

ORDER No.	BRAND/COLOR
3108-010A	NONE/WHITE
3108-110A	IO /WHITE
3108-020A	NONE/BLACK
3108-120A	IO /BLACK

3	WASHER	SK-5	NICKEL	083000-509	1
2	NUT	BRASS	NICKEL	073000-109	1
1	CONTACT	P.BRONZE	GOLD+TIN	3108-***A1	1
	GND	Cu COVERED STEEL	TIN		1
	INSULATOR	P.P UL 94HB	NONE		1
	BODY	ZINC ALLOY	NICKEL		1
	HOUSING	P.B.T.+30%GF	NONE		1
	POST	BRASS	TIN		2
ITEM	DESCRIPTION	MATERIALS	FINISHED	PART NUMBER	Q'TY

RoHS
COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE:			
DIMENSION	ANGLE		
INTEGRAL DIMENSIONS ±1.0	ANGULAR DIMENSIONS ±5.0		
1 PLACE DECIMAL ±0.3	HOLES UNDER Ø0.5 ±0.1		
2 PLACE DECIMALS ±0.15	ROUGHNESS		
	FINISH: SEE TABLE	MATERIAL: SEE TABLE	

nicon Precise Corp.

DWN BY:	LIN YI FUN	DATE:	09-05/96
CHK BY:	ALLEN	DATE:	05-04/98
APVD BY:	Jay	DATE:	3/15/2013

TITLE: BNC STRAIGHT JACK PCB RECEPTACLE			
Model NO: 3108-***A			
Drawing NO: 3108-***A			
UNIT:	MM	SIZE:	A4
REV:	I	CAD FILE:	Z:\CAD-成品圖
SCALE:	2:1	SHEET	1 OF 1