


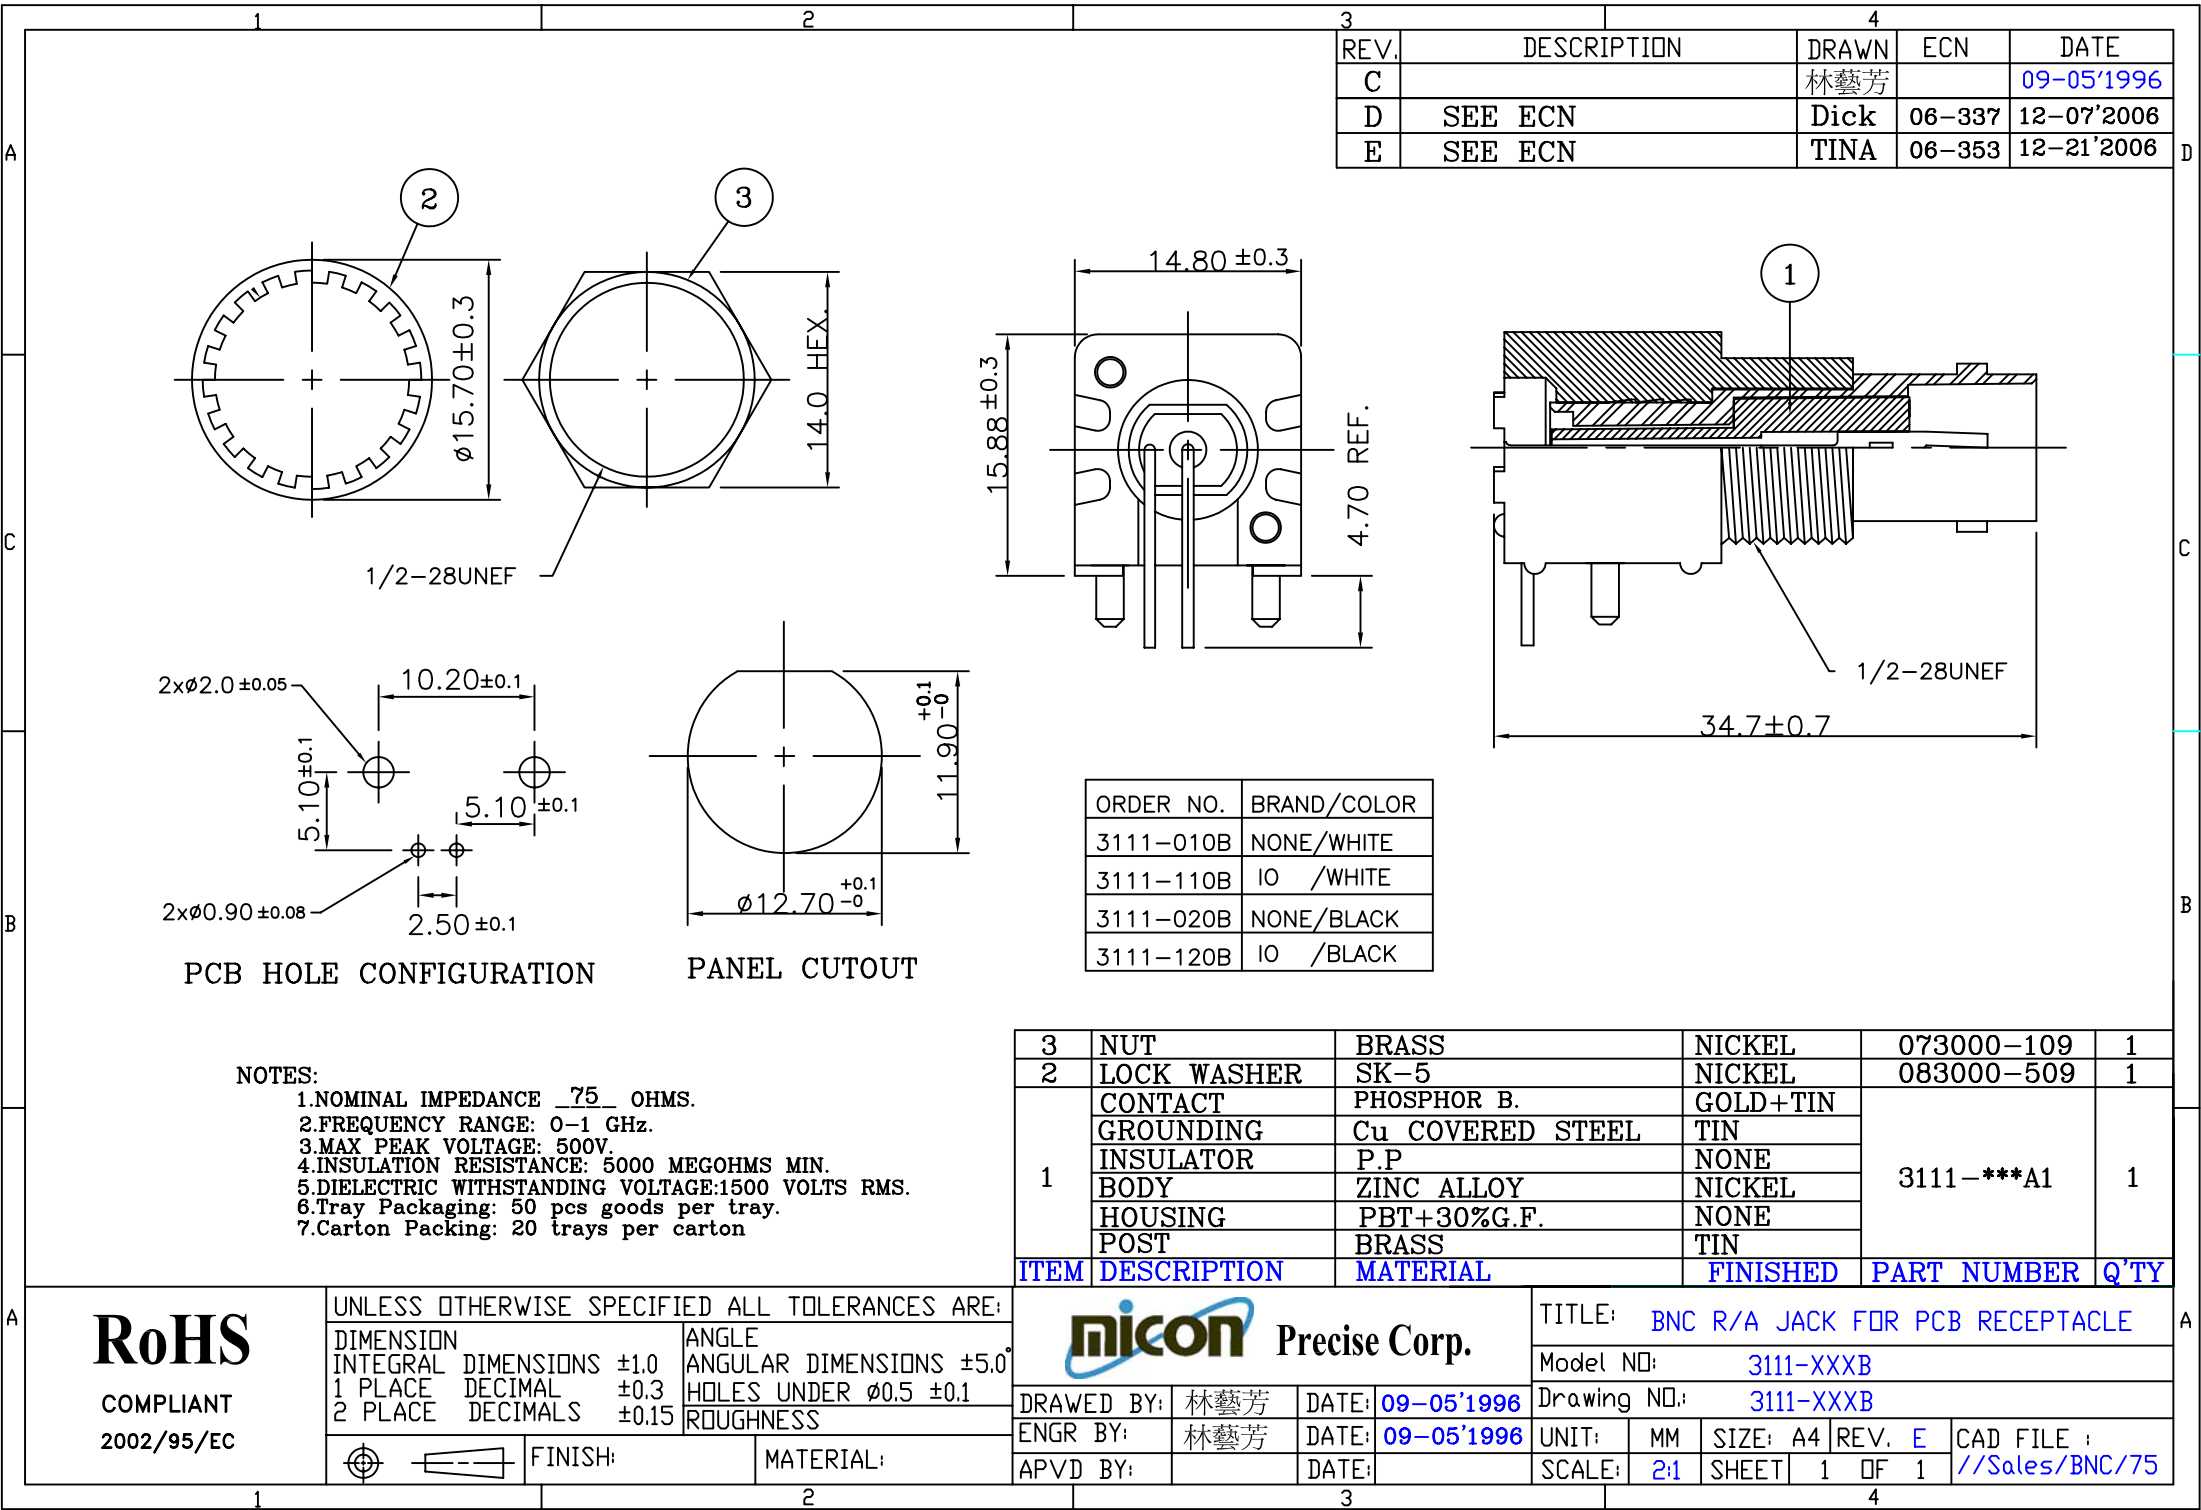

REV.	DESCRIPTION	DRAWN	ECN	DATE
C		林藝芳		09-05'1996
D	SEE ECN	Dick	06-337	12-07'2006
E	SEE ECN	TINA	06-353	12-21'2006

ORDER NO.	BRAND/COLOR
3111-010B	NONE/WHITE
3111-110B	IO /WHITE
3111-020B	NONE/BLACK
3111-120B	IO /BLACK

3	NUT	BRASS	NICKEL	073000-109	1
2	LOCK WASHER	SK-5	NICKEL	083000-509	1
1	CONTACT	PHOSPHOR B.	GOLD+TIN	3111-***A1	1
	GROUNDING	Cu COVERED STEEL	TIN		
	INSULATOR	P.P	NONE		
	BODY	ZINC ALLOY	NICKEL		
	HOUSING	PBT+30%G.F.	NONE		
	POST	BRASS	TIN		
ITEM	DESCRIPTION	MATERIAL	FINISHED	PART NUMBER	Q'TY

- NOTES:
- 1.NOMINAL IMPEDANCE 75 OHMS.
 - 2.FREQUENCY RANGE: 0-1 GHz.
 - 3.MAX PEAK VOLTAGE: 500V.
 - 4.INSULATION RESISTANCE: 5000 MEGOHMS MIN.
 - 5.DIELECTRIC WITHSTANDING VOLTAGE:1500 VOLTS RMS.
 - 6.Tray Packaging: 50 pcs goods per tray.
 - 7.Carton Packing: 20 trays per carton

RoHS
COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE:			
DIMENSION		ANGLE	
INTEGRAL DIMENSIONS ±1.0		ANGULAR DIMENSIONS ±5.0°	
1 PLACE DECIMAL ±0.3		HOLES UNDER Ø0.5 ±0.1	
2 PLACE DECIMALS ±0.15		ROUGHNESS	
	FINISH:	MATERIAL:	

Precise Corp.		TITLE: BNC R/A JACK FOR PCB RECEPTACLE			
		Model NO: 3111-XXXB			
DRAWN BY:	林藝芳	DATE:	09-05'1996	Drawing NO: 3111-XXXB	
ENGR BY:	林藝芳	DATE:	09-05'1996	UNIT:	MM
APVD BY:		DATE:		SIZE:	A4
				REV.	E
				CAD FILE :	//Sales/BNC/75