

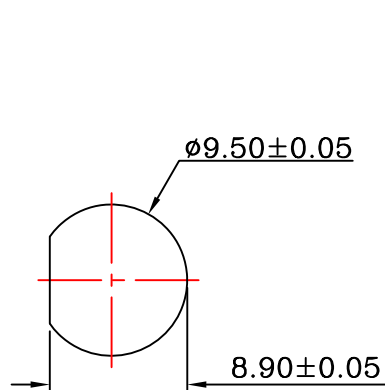
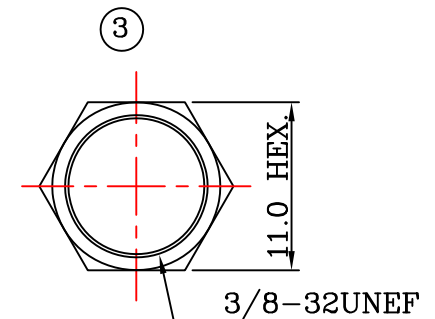




REV.	DESCRIPTION	DRAWN	ECN	DATE
D	SEE ECN	ANGELA	99-025	01-22'99
E	SEE ECN	TINA	01-388	01-07'2002
F	SEE ECN (3007-8130)	TINA	08-096	04-23'2008

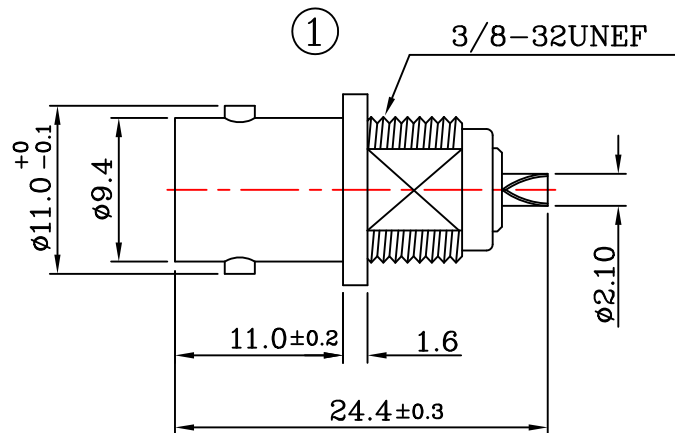

Recommended Panel Hole

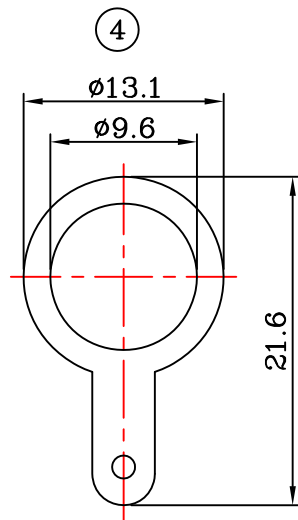

PART NO.	INSULATOR MATERIAL
3322-000A	P.P.
3322-001A	DELRIN
3322-002A	TEFLON
3322-003A	P.P.-VO

NOTES:

1. NOMINAL IMPEDANCE: 50 OHMS.
2. FREQUENCY RANGE: 0-4 GHz.
3. MAX PEAK VOLTAGE: 500 V.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VOLTS RMS.

4	GND LUG	SK-5	TIN	053003-508	1
3	NUT	IRON	NICKEL	073006-609	1
2	LOCK WASHER	SK-5	NICKEL	083001-509	1
1	CONTACT	P.BRONZE	GOLD	3322-00*A1	1
	INSULATOR	SEE TABLE	NONE		
	BODY	ZINC ALLOY	NICKEL		
ITEM	DESCRIPTION	MATERIAL	FINISHED	PART NUMBER	Q'TY

RoHS
COMPLIANT
2002/95/EC

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE:			
DIMENSION		ANGLE	
INTEGRAL DIMENSIONS	±1.0	ANGULAR DIMENSIONS	±5.0°
1 PLACE DECIMAL	±0.5	HOLES UNDER Ø0.5	±0.1
2 PLACE DECIMALS	±0.25	ROUGHNESS	
	FINISH: SEE TABLE	MATERIAL: SEE TABLE	



Precise Corp.

DRAWN BY:	張秀妃	DATE:	05.19.97
ENGR BY:		DATE:	
APVD BY:		DATE:	

TITLE:					
BNC STRAIGHT JACK BULKHEAD RECEPTACLE					
Model NO: 3322-00*A					
Drawing NO: 3322-00*A					
UNIT:	MM	SIZE:	A4	REV.	F
SCALE:	2:1	SHEET	1	OF	1
CAD FILE : Z:\sales\BNC\					